


# Guide for Mosfet unit

## Procedure for mounting of Mosfet unit – 17507

1. The #17507 Mosfet unit can be used with Any AEG model! Only restriction is the physical placement of the small unit.
2. With this unit, power is directed straight from battery to motor without the usual voltage loss from the mechanical switch and selectorplate = Higher ROF and no switch wear.
3. For further performance improvement, we recommend using our Ultra T-plugs #17296 for battery.



1. From the unit to the gearbox the wires are fitted with small plugs that allow you to guide them through receiver parts or similar, before connecting them to the unit. Here shown on a standard M15A4.

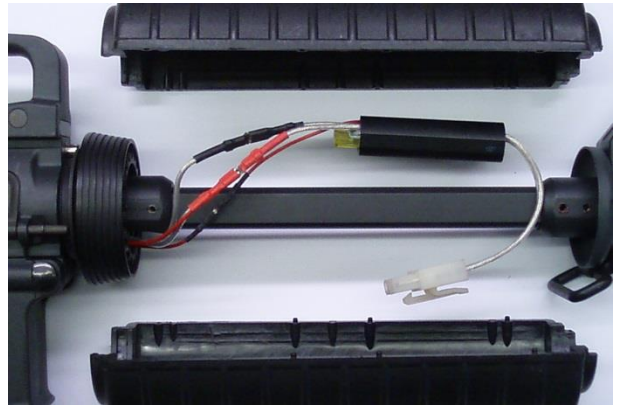

1. Mounting of wires in gearbox:
  - a. First de-solder and remove old wiring
  - b. Then solder the two small red wires (trigger sensor) to the original mechanical trigger switch.
  - c. Guide the motor wires directly to the motor (NOT though the original switch anymore)
  - d. Motor wires are ready mounted with plugs and marked with red for + and black for –
  - e. Note: on some models wires has to be soldered to the motor
  - f. The versatility can be seen on the 4 examples below.

